Technical Specifications

HP Z43 42.5-inch 4K UHD Display




Front

Power LED

Technical Specifications

HP Z43 42.5-inch 4K UHD Display

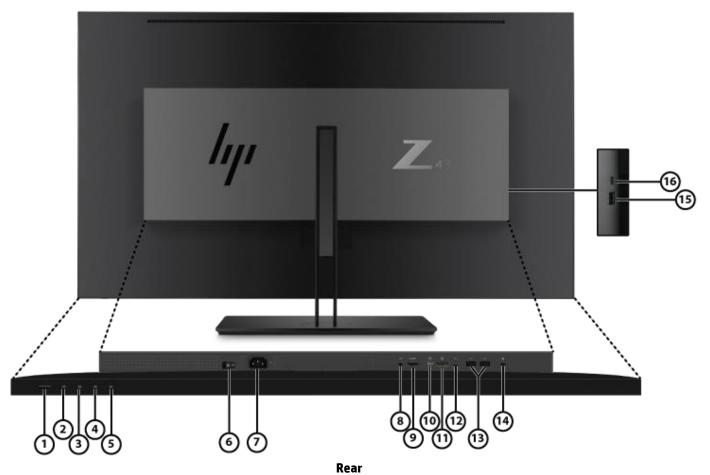

- 1. Power Button
- 2. OSD Button (Viewing Modes)
- 3. OSD Button (Next Active Input)
- **4.** OSD Button (Information)
- **5.** OSD Button (Menu)
- **6.** Power Switch

- 7. Power Connector Port
- 8. Audio Line Out
- 9. HDMI 2.0
- **10.** Mini DisplayPort™ 1.2
- **11.** DisplayPort[™] 1.2
- **12.** USB-C[™] 3.1

- 13. USB 3.0 Type-A Ports
- 14. Security Lock Slot
- 15. USB 3.0 Type-A
- **16.** USB-C[™] 3.1



Technical Specifications

Models: 1AA85A4

Panel Specifications* Display Size (Diagonal) 42.5-in
Display Panel Type IPS

Display Panel Type IPS Native Resolution/Timing 3840×216

Native Resolution/Timing 3840×2160 @ 60 Hz

NOTE: DisplayPort 1.2 or HDMI 2.0 required to drive panel at its native resolution

Panel Bit Depth True 10-bit

Aspect Ratio 16:9
Brightness - Typical 350 cd/m²
Static Contrast Ratio - Typical 1000:1
Static Contrast Ratio - Minimum 700:1
Dynamic Contrast Ratio (DCR) 5,000,000:1

Pixel Pitch 0.2451 x 0.2451 mm

Pixels Per Inch (PPI) 104

Backlight Lamp Life (to half brightness -

in hours) 30k minimum

Anti-Glare Panel Yes

Response Time – Typical 5ms ("gray to gray")

NOTE: Product default is 8ms response time and can be adjusted to as low as 5ms in the display menu.

Horizontal Viewing Angle

(typical CR>10)

Vertical Viewing Angle (typical CR>10) 178°

Panel Active Area (w x h) 941.184 x 529.416 mm (37.05 x 20.84 in)

 Preset Graphic Modes/Supported
 640 x 480@60Hz

 Resolutions
 720 x 400@70Hz

 800 x 600@60Hz

720 x 480@60HZ 1280 x 720@60HZ 1280 x 800@60HZ 1280 x 1024@60HZ 1600 x 900@60HZ 1600 x 1200 @60HZ 1680 x 1050@60HZ 1920 x 1080@60HZ 1920 x 1200@60HZ 2560 x 1440@60HZ 3840 x 2160@30HZ

Maximum Resolution3840×2160 @ 60 HzRecommended Resolution3840×2160 @ 60 Hz

Vertical Scan Range47-63HzHorizontal Scan Range121.8-140 kHz

Maximum Pixel Clock Speed 78MHz

Default Color Temperature Standard (10000K)

*All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

Color Gamut Coverage NTSC 72%

sRGB 96%



Technical Specifications

Color Management Factory Color Calibrated Yes

Factory Color Presets Calibrated (D93), Neutral (D65)

Default Color Temperature D93 **Low Blue Light Modes** Yes

Stand Black Pearl

Plug & Play Yes

Tilt Yes, -5° to +10° **Swivel** Yes, 20°(+/- 10°)

Pivot No Height Adjustment Range No

VESA Mounting Yes, both 200 mm and 100 mm with included bracket

Security Lock Ready Yes

Detachable Base Yes, ships detached

Warranty 3/3/0 Zero Bright Dot Warranty Yes

On Screen Display

(OSD)

Luminance Color Control

> Input Control Image Control

On Screen Display User Controls

PIP Control
Power Control
Menu Control

Management
Language
Information

User Programmable Modes Yes, 20

Monitor Control Buttons or Switches

Menu, Information, Next Active Input, viewing modes,

Power

User-Assignable Function Buttons Yes, 3 (9 options)

10 (English, Spanish, German, French, Italian, Netherlands,

Portuguese, Japanese, T-Chinese and S-Chinese)

Connector Types DisplayPort™ (1) DisplayPort™ 1.2

Mini-DisplayPort™ (1) Mini DisplayPort™ 1.2

HDMI (1) HDMI 2.0 **USB Type-C™** (1) USB 3.1, Gen1

HDCP support Yes HDCP 2.2, (DisplayPort and HDMI)

Audio Output (1) Analog

USB Port USB Version 3.0
Specifications USB Hub Yes
Downstream Ports 4 Ports

Languages

Technical Specifications

Upstream Ports 1 Port Fast Charging USB Ports 3 Ports

7.5W 4.5W

Power Output Maximum 7.5W

15W

USB-Type C™ Port Specifications **USB-Type C™ Version**USB 3.1 Gen1 / 5G bps **USB-Type C™ Hub**Yes

UpstreamRear: 1 PortDownstreamSide: 1 Port

Video Support Rear: USB-C™ Alt mode – DisplayPort™ 1.2

5V/3A 9V/3A 10V/5A

Power Output 12V/5A 15V/4.33A 20V/3.25A

Rear: 65W Max Side: 15W Max

Special Features

Picture-in-Picture, Picture-by-Picture Yes

Power & Operating Specs

Power Supply

Power Output Maximum

Internal

Power Source 90~265 Vac, 45~63 Hz

Power Consumption - Maximum205WEnergy Saving/Standby Mode0.5WPower Consumption - Typical95WPower cable length1.9 m

ENERGY STAR® Data

Operational Mode at 230 VAC

41.4W

EU Energy Efficiency Class (ERP Lot-5)

On-mode Power Consumption

54W

Energy Efficiency Class

A G G

Operating Conditions

Operating Temperature - Celsius $(5^{\circ}-35^{\circ}\text{C})$ Operating Temperature - Fahrenheit $(41^{\circ}-95^{\circ}\text{F})$ Non-operating Temperature - Celsius $-20^{\circ}-60^{\circ}\text{C}$ Non-operating Temperature - $29^{\circ}-140^{\circ}\text{F}$

Fahrenheit

Operating Humidity 20 – 80% Relative Humidity (non-condensing)

Non-operating Humidity 5 – 95%

 Operating Altitude
 0 - 5,000 m (16,400 ft.)

 Non-operating Altitude
 0 - 12.192 m (40,000 ft.)

Mercury-free LED display backlights

Arsenic-Free Display Glass

Yes

Technical Specifications

Environmental	
Features and	
Certifications	

Low Halogen

NOTE: External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts

Yes

obtained after purchase may not be Low Halogen.

CE,CB,KC/KCC/PSB/ICE/TUV-S/ISO 9241-307/

Agency Approvals and Certifications EAC/UL/PSB/ISC/CCC/CEL/CECP/SEPA/Edge/ISC/VCCI/FCC/B

SMI/WEEE

Microsoft WHQL Certification Win 10, Win 8, Win 8.1, Win 7

China Energy Label CEL Grade 1

SmartWay Transport Partnership - NA

only

Yes (NA SKU)

Contains Recycled Plastic

Back Cover Yes Base/Stand Yes

Other Parts Yes **Recyclable Plastics** Yes

Recyclable Packaging (Box, packing

materials)

Yes, except EPS

12,45 kg

Unit Product/Package Specifications

Unpacked with stand (highest setting)

Product Dimensions (W x D x H) **Head Only**

Product Dimensions (W x D x H)

Base Area Footprint

Product Dimensions (W x D x H)

Packaged

Packaged Dimensions (W x D x H)

Plastic Bezel Measurements

Product Weight, Packed Product Weight, Unpacked Product Weight, Head Only

Metric **Imperial** 97,21 x 24 x 61,9 cm 38.27 x 9.44 x 24.37 in

38.27 x 4.83 x 22.28 in

97,21 x 12,28 x 56,59 cm

9.33 x 0.43 x 8.07 in 399,99 x 239,99 mm

112 x 70 x 36 cm 44.09 x 27.56 x 14.17 in

27.45 lb

Top 14,42 mm Top 0.567 in Side 14,43 mm Side 0.567 in Bottom 20,02 mm Bottom 0.788 in 23,47 kg 51.7 lb 16,95 kg 37.38 lb

Pallet Information Pallet Dimensions (L x W x H mm) 735 x 1150 x 120 mm Pallet Dimensions (L x W x H inch) 28.93 x 45.27 x 4.72 in

> Pallet Total Weight (including units) kg 156,32 kg Pallet Total Weight (including units) lbs 344.32 lbs

Pallet Layers 3 Pallet Product per Layer 2 Total Products per Pallet 6 Container Load, 20-Foot

96 units Container Load, 40-Foot 192 units Container Load, 40-Foot HighQ 192 units

HP Z43 42.5-inch 4K UHD Display What's in the box? **Monitor**

Technical Specifications

Software included	HP Display Assistant
	USB-C-to-C cable (1.8m)

VESA Mounting Bracket Yes

 Accessories Included
 AC Power Cord
 1,9 m
 6.2 ft

 DisplayPort™ 1.2 Cable
 1,8 m
 5.9 ft

USB-C™ to USB Type-A Cable 1,8 m 5.9 ft

Other User Guide Languages English, Arabic, S. Chinese, T. Chinese, Czech, Danish,

Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and

Turkish.

Warranty Languages English, Arabic, S. Chinese, T. Chinese, Czech, Danish,

Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and

Turkish.

Service and Warranty Protected by HP, including a 3-year standard limited warranty. Optional HP Care Pack Services are

extended service contracts that extend your protection beyond the standard warranties.1



Technical Specifications

Copyright © 2018 HP Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.

USB Type-C[™] and USB-C[™] are trademarks of USB Implementers Forum.

ENERGY STAR® is a registered trademark owned by the U.S. Environmental Protection Agency.

1. Care Packs are optional. Service levels and response times for HP Care Pack Services may vary depending on your geographic location. Service starts from date of hardware purchase. Restrictions and limitations apply. See http://www.hp.com/go/cpc for details.



Technical Specifications

Change Log	
V1 to V2	"Integrated Mount" removed from Monitor specifications and VESA mounting Bracket added to What's in the box section
/2 to V3 October 2, 2018	Added USB-C-to-C cable (1.8m)
V3 to V4 March 9,2021	Energy Efficiency Class
V4 to V5 February 8, 2023	Energy Efficiency Class
•	

